



LW-1060

60W DELTA LED LOW BAY

BEAM ANGLE: 120°

POWER SUPPLY: Integral Driver

LIFETIME: ≥ 50,000hrs

INPUT VOLTAGE: AC100-277V ~ 50/60Hz

POWER FACTOR: >0.9

OPERATING TEMPERATURE: -13°F ~ +113°F



IK09

Housing: The body of Delta Low Bay is made of aluminum with an anti-corrosive coating to protect it in caustic environments, such as salt spray. The acrylic optical plate has a high-impact resistance, and the luminaire is sealed with resilient gasketing to prevent ingress.

Mounting Options: Available options include the standard yolk mount.

Electrical: The Delta Low Bay comes standard with a high-performance driver that goes from 100-277V, power factor of 90%+, internal to the fixture.

Warranty: Five (5) year warranty on entire system. For more details on warranty conditions, please contact factory.

Lumen Maintenance: The lumen packages are rated for 50,000+ hours (L₇₀).

Certifications: UL certified to UL1598. DLC listed.




ORDERING GUIDE

MODEL	WATTAGE	BEAM ANGLE	CRI	CCT	FINISH	VOLTAGE
LW-1	060	120	8	60	W	U
	060 60W	120 120 DEGREE	8 ≥80	30 3000K 40 4000K 60 6000K	W WHITE	U 100-277V

DIMENSIONS

Lens & Side View

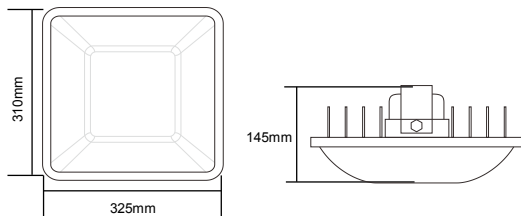


ENERGY DATA

	POWER	LUMENS	EFFICACY
MATTE DIFFUSOR	60W	6900 lm	115 lm/W
CLEAR DIFFUSOR	60W	8100 lm	135 lm/W

PHOTOMETRICS

120° BEAM ANGLE

Light Distribution Curve



Illuminance Distribution

