

## HB-3250A

### 250W DELTA LED HIGH BAY

**BEAM ANGLE:** 60°, 90° & 120°

**POWER SUPPLY:** Replaceable Driver

**LIFETIME:** ≥ 50,000hrs

**INPUT VOLTAGE:** AC100-277V ~ 50/60Hz

**POWER FACTOR:** >0.9

**OPERATING TEMPERATURE:** -13°F ~ +113°F



**IK09**

**Housing:** The body of Delta High Bay series is made of aluminum with an anti-corrosive coating to protect it in caustic environments, such as salt spray. The acrylic optical plate has a high-impact resistance, and the luminaire is sealed with resilient gasketing to prevent ingress.

**Mounting Options:** Available options include a standard u-mount with an eyelet, as well as ridged-mount in order to adapt to other mounting requirements.

**Electrical:** The Delta High Bay comes standard with a high-performance, replaceable driver that goes from 100-277V, power factor of 90%+. The Easy Interchange System (EIS) allows for simple and easy field replaceability of the driver.

**Warranty:** Five (5) year warranty on entire system. For more details on warranty conditions, please contact factory.

**Lumen Maintenance:** The lumen packages are rated for 50,000+ hours ( $L_{70}$ ).

**Certifications:** UL certified to UL1598. DLC listed (for Universal Voltage, 100-277V).




With **EIS**

## ORDERING GUIDE

MODEL	WATTAGE	BEAM ANGLE	CRI	CCT	FINISH	VOLTAGE
HB-3	250A		8		DB	U
	250A 250W	M 60 DEGREE	8 ≥80	30 3000K	DB DARK BRONZE	U 100-277V
		W 90 DEGREE		40 4000K		
		WW 120 DEGREE		50 5000K		

## DIMENSIONS

Side & Lens View

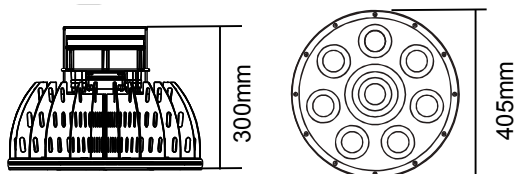


## ENERGY DATA

	POWER	LUMENS	EFFICACY
60° BEAM ANGLE	250W	34,250 lm	137 lm/W
90° BEAM ANGLE	250W	34,250 lm	137 lm/W
120° BEAM ANGLE	250W	34,250lm	137 lm/W

## PHOTOMETRICS

### 120° BEAM ANGLE

Light Distribution Curve



Illuminance Distribution

