

## LWL-1080

### 80W DELTA LED LINEAR LOW BAY

**BEAM ANGLE:** 120°

**INPUT VOLTAGE:** AC100-277V ~ 50/60Hz



**IK07**

**POWER SUPPLY:** Integral Driver

**POWER FACTOR:** >0.9

**LIFETIME:** ≥ 50,000hrs

**OPERATING TEMPERATURE:** -13°F ~ +113°F

**Housing:** The body of Delta Linear Low Bay is made of aluminum with an anti-corrosive coating to protect it in caustic environments, such as salt spray. The polycarbonate diffusor has a high-impact resistance, and the luminaire is sealed with resilient gasketing to prevent ingress.

**Mounting Options:** Available options include the center mount bracket.

**Electrical:** The Delta Linear Low Bay comes standard with a high-performance driver that goes from 100-277V, power factor of 90%+, internal to the fixture.

**Warranty:** Five (5) year warranty on entire system. For more details on warranty conditions, please contact factory.

**Lumen Maintenance:** The lumen packages are rated for 50,000+ hours (L<sub>70</sub>).

**Certifications:** UL certified to UL1598.




## ORDERING GUIDE

MODEL	WATTAGE	BEAM ANGLE	CRI	CCT	DIFFUSOR	FINISH	VOLTAGE
LWL-1	080	WW	8			W	U
	080 80W	WW 120 DEGREE	8 ≥80	30 3000K 40 4000K 60 6000K	MT MATTE CL CLEAR	W WHITE	U 100-277V

## DIMENSIONS


Lens & Side View

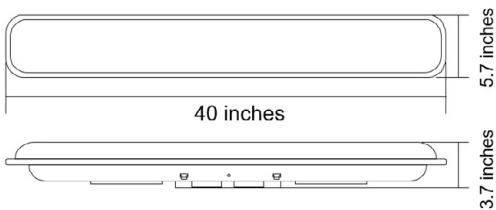

## ENERGY DATA

	POWER	LUMENS	EFFICACY
<b>MATTE DIFFUSOR</b>	80W	9,200 lm	115 lm/W
<b>CLEAR DIFFUSOR</b>	80W	10,800 lm	135 lm/W

## PHOTOMETRICS



LWL-1080		
H(m)	E(x)	D(cm)
1	2290	320
2	573	640
3	255	950
4	143	1270
5	92	1590
6	64	1910
7	47	2230
8	36	2540
9	28	2860
10	23	3180