

## DELTA Street Light



### FEATURES

- Durable die-cast aluminum housing
- Dark Bronze finish
- Type III lighting distribution
- Tenon mount adapter standard
- IP65 and IK09 rated
- Anti-corrosive finish to withstand harsh environments
- Optional photocell
- 5 Year Warranty

### APPLICATIONS

- Roadway
- Parking Lot
- Walkway
- Area Lighting
- Recreational

### CONSTRUCTION

The body of Delta Street Light series is made of aluminum with an anti-corrosive coating to protect it in caustic environments, such as salt spray. The polycarbonate optical plate has a high-impact resistance, and the luminaire is sealed with resilient gasketing to prevent ingress.

### WARRANTY

- Limited Five (5) Year Warranty standard

For more information regarding the limited five (5) year warranty please contact the factory at (844) 202-5606 or email Customer Service at [LEDCustService@dascom.com](mailto:LEDCustService@dascom.com).



### ORDERING GUIDE

SERIES	WATTAGE	BEAM ANGLE	CRI	CCT	FINISH	VOLTAGE	OPTIONS
ST-3	150A 150W	T3 TYPE III (145 x 65)	8 ≥80	50 5000K	GRY GRAY	U 100-277V	PC PHOTOCCELL

## DELTA Street Light

### SPECIFICATIONS

LED SPECIFICATION			5000K		EPA*	BUG	WEIGHT (lbs.)	CERTIFICATION
MODEL	WATTS	OPTIC	LUMENS	EFFICACY				
ST-3150A	142	T3	21,600	144 lm/W	2.33 ft²	B3-U3-G3	8.82	UL, CE


\* EPA Ratings listed assume fixture is mounted horizontally. EPA rating will vary based on mounting angle.

SPECIFICATION	VALUE	
PERFORMANCE	Power Consumption (W)	142
	Lumens Delivered (lm)	21,600
	Efficacy (lm/W)	144
	CRI	≥80
	Color Temperature (K)	5000
	L70 Lumen Maintenance (hr)	50,000
ELECTRICAL	Power Factor	> 0.9
	Input Voltage	100-277V ~ 50/60 Hz
	Dimming	Non-dimmable
	THD	< 0.2
	Photocell Sensor	Optional
OPTICS	Beam Angle (°)	TYPE III (145 x 65)
	Glare Shield	No
INSTALLATION	Standard Mount	Adjustable Tenon Mount
	Optional Mount	Light Pole and/or Pole Arms available but not included
	Tilt	20°+ Vertically
CERTIFICATION	Certifications	UL / CE
	IP	65
	IK	09
	Environment	Outdoor / Wet
	Ambient Operating Temperature	-25°C ~ +45°C / -13°F ~ +113°F
Warranty	Limited (5) Year	

## DELTA Street Light

### DIMENSIONAL DRAWINGS

ST-3150A

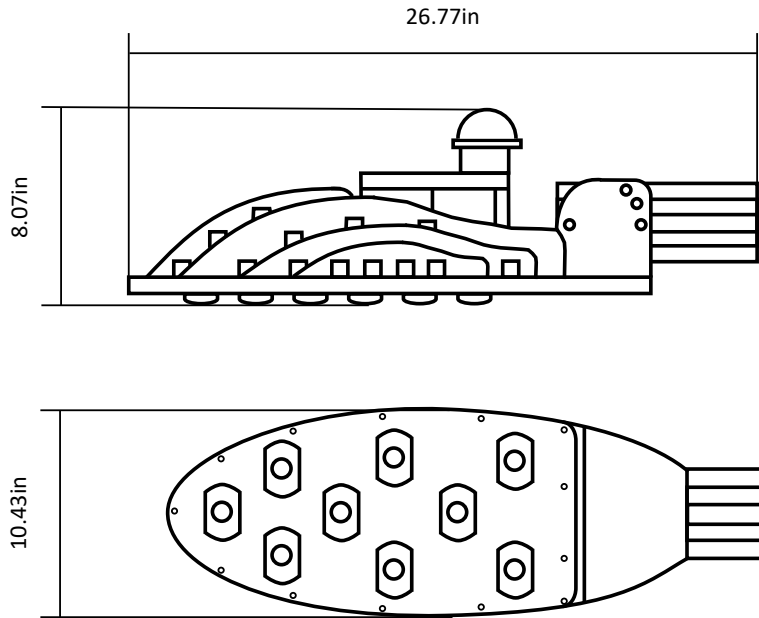

### PHOTOMETRICS

ST-3150A

