

Rotatable Wall Pack



FEATURES

- Durable aluminum alloy housing
- Dark Bronze finish
- Medium lighting distribution
- Each light module is 360° rotatable
- IP65 rated
- 5 Year Warranty

APPLICATIONS

- Security
- Perimeter Lighting
- Facade
- Entry / Exit
- Recreational

CONSTRUCTION

Die-cast Aluminum Housing and Polycarbonate lens suitable for all environments. The unit is sealed with resilient gasketing to prevent ingress. The wall pack mounts directly to a standard junction box for easy retrofit of traditional fixtures.

WARRANTY

- Limited Five (5) Year Warranty standard

For more information regarding the limited five (5) year warranty please contact the factory at (844) 202-5606 or email Customer Service at LEDCustService@dascom.com.



ORDERING GUIDE

SERIES	WATTAGE	BEAM ANGLE	CRI	CCT	FINISH	VOLTAGE
WP-6	080 80W 120 120W	M 60 DEGREE	7 ≥72	50 5000K	DB DARK BRONZE	U 100-277V

Rotatable Wall Pack

SPECIFICATIONS



LED SPECIFICATION			5000K		WEIGHT (lbs.)	CERTIFICATION
MODEL	WATTS	OPTIC	LUMENS	EFFICACY		
WP-6080	80	M	10,800	135 lm/W	12.4	UL
WP-6120	120	M	16,200	135 lm/W	12.4	UL

SPECIFICATION		VALUE
PERFORMANCE	Power Consumption (W)	80 / 120
	Lumens Delivered (lm)	10,800 - 16,200
	Efficacy (lm/W)	135
	CRI	≥72
	Color Temperature (K)	5000
	L70 Lumen Maintenance (hr)	50,000
ELECTRICAL	Power Factor	> 0.9
	Input Voltage	100-277V ~ 50/60 Hz
	Dimming	0-10V dimmable
	THD	< 0.2
	Dusk-to-Dawn Sensor	No
OPTICS	Beam Angle (°)	60
	Glare Shield	No
INSTALLATION	Standard Mount	Base plate direct mount to junction box
	Tilt	Each light module is 360° rotatable
CERTIFICATION	Certifications	UL
	IP	65
	Environment	Outdoor / Wet
	Ambient Operating Temperature	-20°C ~ +50°C / -4°F ~ +122°F
	Warranty	Limited (5) Year

Rotatable Wall Pack


DIMENSIONAL DRAWINGS

WP-6080 / WP-6120

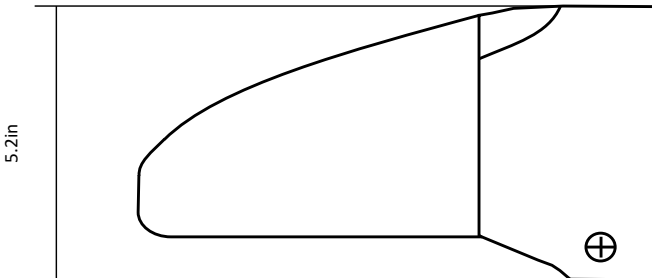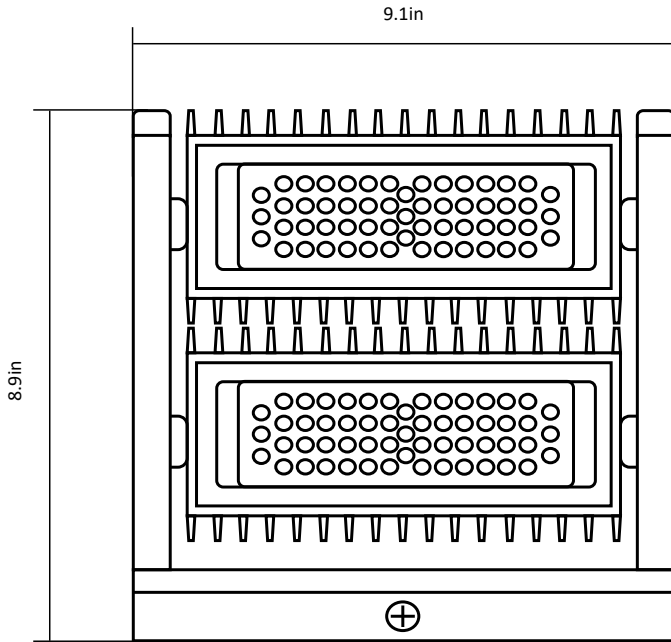


PHOTOMETRICS

WP-6080

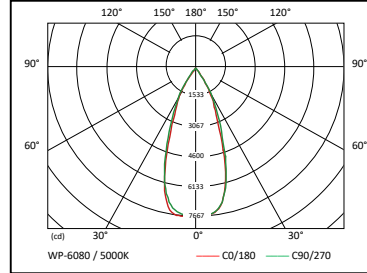

WP-6080 / 5000K		
H (m)	E (lk)	D (cm)
1	8737	1161
2	2005	2322
3	863	3483
4	477	4644
5	302	5805

WP-6120

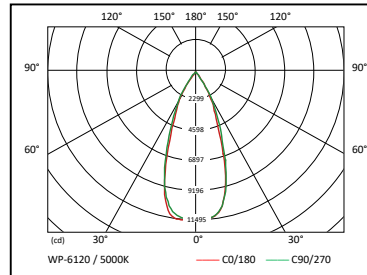

WP-6120 / 5000K		
H (m)	E (lk)	D (cm)
1	13105	1161
2	3007	2322
3	1294	3484
4	715	4644
5	453	5804