

## ST-5150

### 150W SHOEBOX LED STREET LIGHT

**BEAM ANGLE:** Type III

**INPUT VOLTAGE:** AC100-277V ~ 50/60Hz

**POWER SUPPLY:** Internal Driver

**POWER FACTOR:** >0.9

**LIFETIME:** ≥ 50,000hrs

**OPERATING TEMPERATURE:** -40°F ~ +113°F



**IK08**

**Housing:** The body of this luminaire is made of aluminum with an anti-corrosive coating to protect it in caustic environments, such as salt spray. The acrylic optical plate has a high-impact resistance, and the luminaire is sealed with resilient gasketing to prevent ingress.

**Mounting Options:** Slipfitter option standard. Other mounting options include a yoke mount and square pole mount. Pole arms are not included.

**Electrical:** The luminaire comes standard with a high-performance driver that goes from 100-277V, power factor of 90%+, and 0-10V dimmable.

**Warranty:** Five (5) year warranty on entire system. For more details on warranty conditions, please contact factory.

**Lumen Maintenance:** The lumen packages are rated for 50,000+ hours (L<sub>70</sub>).


**Certifications:** UL certified to UL1598. DLC certified.



## ORDERING GUIDE

MODEL	WATTAGE	BEAM ANGLE	CRI	CCT	FINISH	VOLTAGE	MOUNTING
ST-5	150	T3	7		BLK	U	
	150 150W	T3 TYPE III	7 ≥70	40 4000K 50 5000K	BLK BLACK	U 100-277V	SF SLIPFITTER YK YOKE SP SQUARE POLE

## PHOTOMETRICS

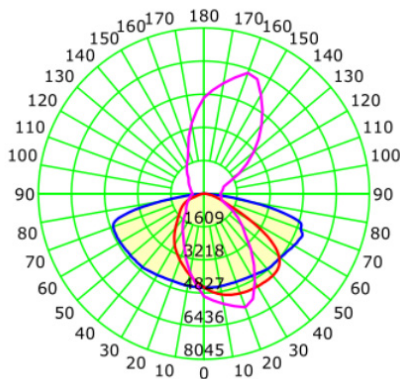

## ENERGY DATA

	POWER	LUMENS	EFFICACY
TYPE III DIST.	150W	19,500 lm	130 lm/W

## OPTIONS



SF - SLIPFITTER



YK - YOKE



SP - SQUARE POLE MOUNT