

ST-5300

300W SHOEBOX LED STREET LIGHT

BEAM ANGLE: Type III

INPUT VOLTAGE: AC100-277V ~ 50/60Hz

POWER SUPPLY: Internal Driver

POWER FACTOR: >0.9

LIFETIME: ≥ 50,000hrs

OPERATING TEMPERATURE: -40°F ~ +113°F



IK08

Housing: The body of this luminaire is made of aluminum with an anti-corrosive coating to protect it in caustic environments, such as salt spray. The acrylic optical plate has a high-impact resistance, and the luminaire is sealed with resilient gasketing to prevent ingress.

Mounting Options: Slipfitter option standard. Other mounting options include a yoke mount and square pole mount. Pole arms are not included.

Electrical: The luminaire comes standard with a high-performance driver that goes from 100-277V, power factor of 90%+, and 0-10V dimmable.

Warranty: Five (5) year warranty on entire system. For more details on warranty conditions, please contact factory.

Lumen Maintenance: The lumen packages are rated for 50,000+ hours (L₇₀).


Certifications: UL certified to UL1598. DLC certified.



ORDERING GUIDE

MODEL	WATTAGE	BEAM ANGLE	CRI	CCT	FINISH	VOLTAGE	MOUNTING
ST-5	300	T3	7		BLK	U	
	300 300W	T3 TYPE III	7 ≥70	40 4000K 50 5000K	BLK BLACK	U 100-277V	SF SLIPFITTER YK YOKE SP SQUARE POLE

PHOTOMETRICS

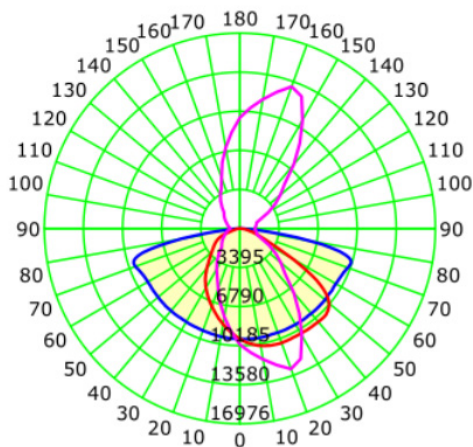

ENERGY DATA

	POWER	LUMENS	EFFICACY
TYPE III DIST.	300W	39,000 lm	130 lm/W

OPTIONS



SF - SLIPFITTER



YK - YOKE



SP - SQUARE POLE MOUNT