

Delta High Bay Installation Guide

TECHNICAL PARAMETERS

PRODUCT PHOTO			
MODEL NUMBER	HB-3100A	HB-3150A	HB-3250A
POWER CONSUMPTION	97W	149W	239W
LED DIODES	5	5	8
OPERATING VOLTAGE	100-277V AC ~ 50/60Hz		
HOUSING MATERIAL	Aluminum		
OPERATING TEMPERATURE	-25°C ~ +45°C / -13°F ~ +113°F		
IP RATING	65		
WEIGHT	11.01	11.01	21.38
DIMENSIONS	13.18 x 13.18 x 8.85	13.18 x 13.18 x 8.85	12.99 x 17.32 x 20.47

ATTENTION

This manual instructs the important information of installation and operation. Be sure to strictly follow the instructions before use. To ensure correct installation and operation of the product, carefully read and understand all contents of this guide. Any mechanical or electrical modifications to the product will void warranty and may cause dangerous hazards. To avoid potential issues caused by high temperature, be sure no objects are on the lens while the product is switched on.

GENERAL MAINTENANCE



Make sure there is no power running to the luminaire when performing maintenance. The lens and the housing can be cleaned using a soft cloth without any corrosive material.

INSTALLATION PREPERATION

1. Take out the luminaire from the box and place it on a level platform for easy installation.
2. For proper operation, a qualified electrician should perform the installation.
3. Ensure the normal ambient temperature of the installation location is between -25°C ~ +45°C.
4. Ensure the voltage of the luminaire is capatable with the onsite voltage before installation.
5. Any luminaire with damaged power cord should not be installed.

Note: The power must be cut off before installation.

INSTALLATION DIAGRAM

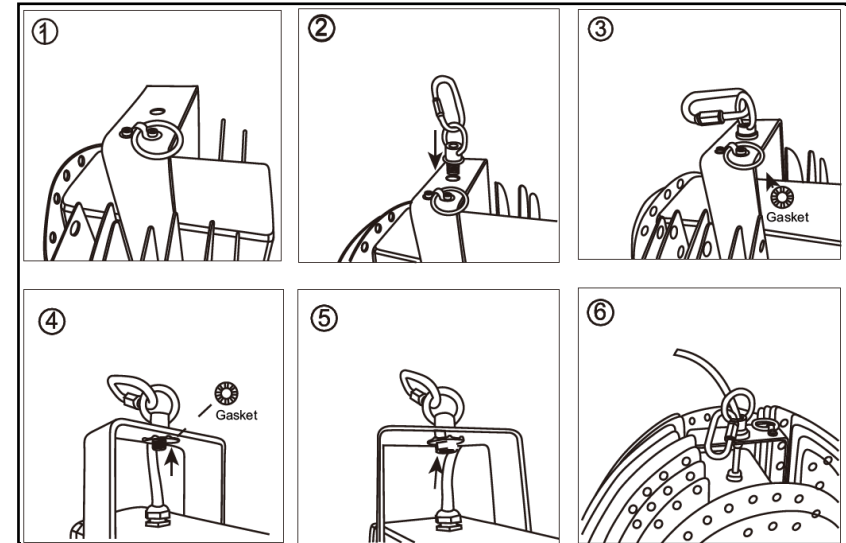

LIVE = BLACK

NEUTRAL = WHITE

GROUND = GREEN

1. Take the unit out of the box to install the mounting ring.
2. Screw the ring into the designated hole on the mounting bracket.
3. Attach the gasket to the bottom of the ring.
4. Make sure there are no gaps around the gasket.
5. Screw the hex nut to fasten the ring on the bracket.
6. Unit is ready for installation. Please use the carabiner for additional safety.

TROUBLESHOOTING

SITUATION	POSSIBLE REASON	POSSIBLE SOLUTION
LED DOES NOT LIGHT UP	Incorrect input wiring	Confirm wire colors
	No power to the luminaire	Recycle power or check power connection
	Incorrect voltage	Confirm voltage
LED FLICKER	Poor power connection	Check power connection
	Input voltage fluctuation	Confirm voltage