

DELTA Linear Low Bay



FEATURES

- Durable die-cast aluminum housing
- Clear or Frosted Polyacrylate lens
- Wide lighting distribution
- Yoke Mount for Surface Mounting
- IP65 and IK07 rated
- Anti-corrosive finish to withstand harsh environments
- 5 Year Warranty

APPLICATIONS

- Parking Garage
- Venue Concourse
- Tunnels
- Car Wash
- Recreational

CONSTRUCTION

The body of Delta Low Bay is made of aluminum with an anti-corrosive coating for protection in caustic environments, such as salt spray. The polyacrylate optical plate has a high-impact resistance, and the luminaire is sealed with resilient gasketing to prevent ingress.

WARRANTY

- Limited Five (5) Year Warranty standard

For more information regarding the limited five (5) year warranty please contact the factory at (844) 202-5606 or email Customer Service at LEDCustService@dascom.com.



ORDERING GUIDE

SERIES	WATTAGE	BEAM ANGLE	CRI	LENS	CCT	FINISH	VOLTAGE
LWL-1	040 40W 060 60W 080 80W	WW 120 DEGREE	8 ≥80	C CLEAR F FROSTED	60 6000K	WHT WHITE	U 100-277V

DELTA Linear Low Bay

SPECIFICATIONS


LED SPECIFICATION			6000K		WEIGHT (lbs.)	CERTIFICATION		
MODEL	WATTS	DIFF.	LUMENS	EFFICACY				
LW-1040	39	CL	5,397	138 lm/W	7.28	CE		
		FR	4,597	118 lm/W				
LW-1060	60	CL	8,095	135 lm/W		7.28	CE	
		FR	6,896	115 lm/W				
LW-1080	77	CL	10,800	140 lm/W			7.28	CE
		FR	9,200	119 lm/W				

SPECIFICATION		VALUE
PERFORMANCE	Power Consumption (W)	39 / 60 / 77
	Lumens Delivered (lm)	4,597 - 10,800
	Efficacy (lm/W)	115 - 140
	CRI	≥80
	Color Temperature (K)	6000
	L70 Lumen Maintenance (hr)	50,000
ELECTRICAL	Power Factor	> 0.9
	Input Voltage	100-277V ~ 50/60 Hz
	Dimming	Non-dimmable
	THD	< 0.2
	Motion Sensor	No
OPTICS	Beam Angle (°)	120
	Lens Material	Polyacrylate lens in Clear or Matte finish
INSTALLATION	Standard Mount	Aluminum Yoke Mount
	Optional Mount	None
	Anti-Vibration Mount	No
	Tilt	160°+ Vertically
CERTIFICATION	Certifications	CE
	IP	65
	IK	07
	Environment	Indoor / Outdoor / Wet
	Ambient Operating Temperature	-25°C ~ +45°C / -13°F ~ +113°F
	Warranty	Limited (5) Year

DELTA Linear Low Bay



DIMENSIONAL DRAWINGS

LWL-1040 & LWL-1060 & LWL-1080


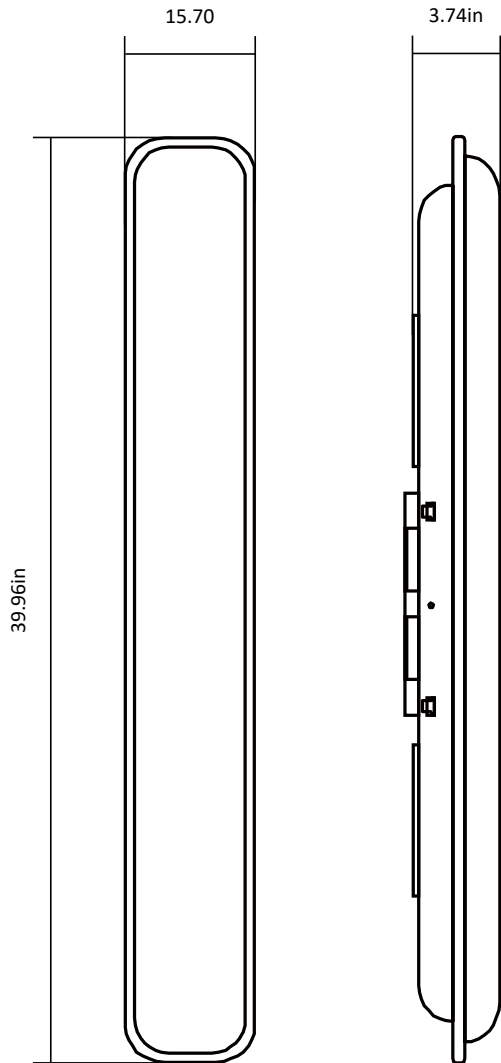


PHOTOMETRICS

LWL-1040

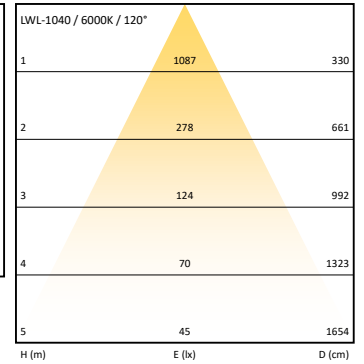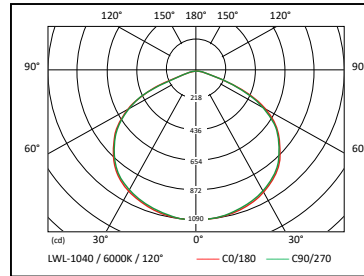

LWL-1060

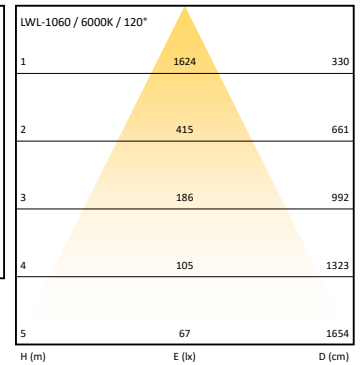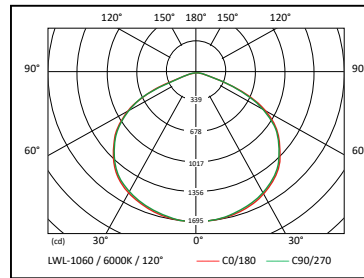

LWL-1080

